



DATA SHEET

residual current circuit-breaker

DFS 4 040-4/0,03-A ASA12

sensitive to pulsating and alternating currents Type A, With operating current trip and Auxiliary switch

Article number 09134855



Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. Series DFS 4 devices are compact two or four-pole residual current circuit-breakers. In the standard design, they only take up four module width units of space. Although DFS 4 devices for AC and pulsating DC residual currents are actually designed for three-phase networks, they can also be used in single-phase networks. However, in addition to these, special variants are also available for single or three-phase operation in the form of the AC/DC sensitive designs (type B, type B+). In spite of the compact dimensions, a number of different tripping currents and characteristics are available at rated currents, depending on the design, up to 125 A. They also have large two-tier terminals for large conductor cross-sections, a practical multi-functional switch toggle and can be provided with labels using free-of-charge software. Type A residual current circuit-breakers are sensitive to pulsating and alternating currents. This function is independent of the mains voltage. In the ASA variant, the DFS is triggered when an external voltage is applied to the corresponding connection terminals of the additional module. The LED integrated in the RCCB indicates tripping caused by a control element. In this state, reclosing of the RCCB is prevented. The DFS 4 A ASA series also has an integrated auxiliary switch.

Features

tripping not dependent on mains and auxiliary voltage, sensitive to AC residual currents and pulsating DC residual currents (type A), compact design for all rated currents, high short-circuit resistance, double-sided two-tier terminals for large conductor cross-section and busbar, switch position indicator, viewing window for labels, multifunction switch toggle with three positions: "on", "off" and "tripped", Neutral conductor position left

Mounting

quick fastening to mounting rail, any installation position, supply from any direction

Applications

Power supplies to residential and purpose-built buildings as well as industrial facilities with TN-S, TT and TN-C-S networks. In IT networks, the residual current circuit-breakers of this series can be set to switch off in the event of a second fault, Excluded is the application in TN-C systems and for the protection of installations in which electronic equipment could generate smooth DC currents or residual currents with frequencies other than 50 Hz. Comprehensive protection is not provided in this case. For these applications we recommend our AC/DC sensitive residual current circuit-breakers (Type B or B+).

Accessories

terminal caps KA, information stickers HAS, restart locks DFS WES, software DBS

Technical Data

Technical Data	DFS 4 040-4/0,03-A ASA12
Series	DFS 4 A ASA
Number of poles	4
Residual current type	A
Rated current (AC)	40 A
Rated residual current I Δ n	0.03 A
Short-time delayed	false
min. Operating voltage range of test circuit	250 V


Subject to technical changes

Technical Data	DFS 4 040-4/0,03-A ASA12
max. Operating voltage range of test circuit	440 V
	auxiliary device (Shunt release, Auxiliary switch)
	Control input (operating current trip)
Number	1
Rated voltage (DC)	12 V
Rated power	0.1 W
	load circuit
Specification	load disconnect contact
min. Contact opening	4 mm
Rated voltage (AC)	230 V, 400 V
Rated current (AC)	40 A
Rated short-circuit current	10 kA
Surge current strength	0.25 kA
max. Total rated switching capacity	500 A
Rated insulation voltage	400 V
Rated impulse withstand voltage	4 kV
Rated frequency	50 Hz
Current heat loss per current path	1.2 W
Thermal Backup-fuse OCPD	40 A
Short-circuit backup-fuse SCPD	100 A
Back-up fuse type	gG
	Auxiliary switch (operating current trip)
Specification	switching contact
Number of poles (total)	1
Rated voltage (AC)	230 V
Rated voltage (DC)	110 V
Rated current (AC)	max. 6 A
Rated current (DC)	max. 1 A
Current heat loss per current path	0.54 W
Back-up fuse (short-circuit)	6 A
Back-up fuse type	gL
	screw-type terminal top and bottom (load circuit)
Neutral conductor position	left
Protection against direct contact	DGUV V3, VDE 0660-514, finger and back-of-hand proof
Connection C1 Maximum number of conductors per terminal	2 (conductors of same type and cross-section)
Cross section solid	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Connecting capacity flexible	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Cross section stranded	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Cross section AWG, solid	15 ... 1
Cross section AWG, stranded	15 ... 1
Cross section AWG, flexible	15 ... 1
Cross section AWG, flexible with ferrule	15 ... 1
Tightening torque	2.5 Nm ... 3 Nm
	screw-type terminal top and bottom (Operating current trip, auxiliary switches)


Subject to technical changes

Technical Data	DFS 4 040-4/0,03-A ASA12
max. Cable length	500 m
Allowed types of wires	solid conductor, flexible conductor, stranded conductors with ferrule
Connection C2 Maximum number of conductors per terminal	2 (conductors of same type and cross-section)
Cross section solid	1-wire: 1 mm ² ... 1.5 mm ² ; 2-wire: 1 mm ² ... 1.5 mm ²
Cross section flexible with ferrule	1 mm ² ... 1.5 mm ²
Cross section stranded	1-wire: 1 mm ² ... 1.5 mm ² ; 2-wire: 1 mm ² ... 1.5 mm ²
Cross section AWG, solid	17 ... 16
Cross section AWG, stranded	17 ... 16
Cross section AWG, flexible with ferrule	17 ... 16
Tightening torque	max. 0.8 Nm
Thickness busbar	min. 0.8 mm
General data	
Operating position	optional
max. Operating altitude above MSL	2000 m
Mechanical endurance	min. 5000 cycles
Electrical endurance	min. 2000 cycles
Surrounding atmosphere	normal environmental conditions
Storage temperature	-35 °C ... 75 °C
Ambient temperature	-25 °C ... 40 °C
Climate resistance	according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH)
Shock resistance	20 g / 20 ms Duration
Fatigue limit	> 5 g (f ≤ 80 Hz, duration > 30 min.)
Housing type	distribution board housing
Installation type	Mounting rail (35 mm)
Housing material	thermoplastic
Protection class	IP20 (installed: IP40)
sealable	true
Width	81 mm
Height	85 mm
Depth	75 mm
Installation depth	69 mm
Module widths	4.5
Weight	0.52 kg
Design requirements/Standards	VDE V 0664-120, DIN EN 61008-1
Degree of pollution	2

Dimensions

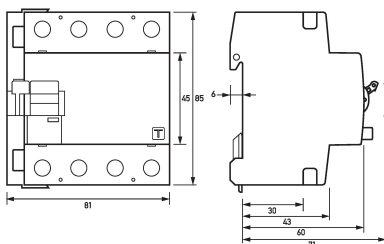

Wiring example

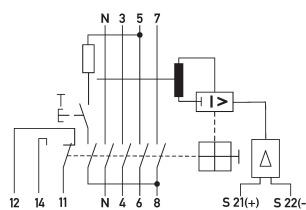

Subject to technical changes

Dimensional drawing Group view

Wiring diagram