




## DATA SHEET

**residual current circuit-breaker**  
**DFS 4 080-4/0,03-AC Hz60 V120/208**  
*sensitive to residual currents Type AC, for frequencies ≠ 50 Hz, Rated voltage 120 V, 208 V*  
 Article number 09154931



### Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. Series DFS 4 devices are compact two or four-pole residual current circuit-breakers. In the standard design, they only take up four module width units of space. Although DFS 4 devices for AC and pulsating DC residual currents are actually designed for three-phase networks, they can also be used in single-phase networks. However, in addition to these, special variants are also available for single or three-phase operation in the form of the AC/DC sensitive designs (type B, type B+). In spite of the compact dimensions, a number of different tripping currents and characteristics are available at rated currents, depending on the design, up to 125 A. They also have large two-tier terminals for large conductor cross-sections, a practical multi-functional switch toggle and can be provided with labels using free-of-charge software. Switches with residual current characteristic AC only detect AC residual currents. They cannot detect pulsating DC residual currents so are not permitted for use as residual current operated protective devices in Germany. They are therefore only available as export models. Devices in the Hz design are intended for rated mains frequencies other than 50Hz. Common frequencies are 60 or 400 Hz; devices for other frequencies can be manufactured upon request. The frequency range for tripping current detection remains unaffected by this. Devices in design V are made for special voltages.

### Features

tripping not dependent on mains and auxiliary voltage, sensitive to AC residual currents (type AC) , compact design for all rated currents, high short-circuit resistance, double-sided two-tier terminals for large conductor cross-section and busbar, switch position indicator, viewing window for labels, multifunction switch toggle with three positions: "on", "off" and "tripped", Neutral conductor position left

### Mounting

quick fastening to mounting rail, any installation position, supply from any direction

### Applications

Power supplies to TT, TN-S and TN-C-S networks with mains frequencies > 50 Hz, Not permitted for use in TN-C networks; not permitted for protecting systems in which electronic equipment may cause pulsating or smooth DC residual currents or residual currents with frequencies not equal to 50 Hz. Comprehensive protection is not provided with an RCCB type AC. For these applications we recommend our residual current circuit-breaker type A or our AC/DC sensitive residual current circuit-breaker type B/B+.

### Accessories

automatic reclosing devices DFA, terminal caps KA, information stickers HAS, auxiliary switches DHi, restart locks DFS WES, software DBS

### Technical Data

| Technical Data                               | DFS 4 080-4/0,03-AC Hz60 V120/208 |
|--|-----------------------------------|
| Series                                       | DFS 4 AC Hz V                     |
| Number of poles                              | 4                                 |
| Residual current type                        | AC                                |
| Rated current (AC)                           | 80 A                              |
| Rated residual current IΔn                   | 0.03 A                            |
| Short-time delayed                           | false                             |
| Selective                                    | false                             |
| min. Operating voltage range of test circuit | 150 V                             |

Subject to technical changes

| Technical Data  | DFS 4 080-4/0,03-AC Hz60 V120/208   |
|---|---|
| max. Operating voltage range of test circuit            | 250 V   |
| Maximum disconnection times                             | $1 \cdot I_{\Delta n} \leq 300 \text{ ms}$ ; $5 \cdot I_{\Delta n} \leq 40 \text{ ms}$                  |
|   | <b>load circuit</b>   |
| Specification   | load disconnect contact   |
| min. Contact opening                                    | 4 mm  |
| Rated voltage (AC)                                      | 120 V, 208 V  |
| Rated current (AC)                                      | 80 A  |
| Rated short-circuit current                             | 10 kA   |
| Surge current strength                                  | 0.25 kA   |
| max. Total rated switching capacity                     | 800 A   |
| Rated insulation voltage                                | 400 V   |
| Rated impulse withstand voltage                         | 4 kV  |
| Rated frequency   | 60 Hz   |
| Current heat loss per current path                      | 5 W   |
| Thermal Backup-fuse OCPD                                | 80 A  |
| Short-circuit backup-fuse SCPD                          | 125 A   |
| Back-up fuse type                                       | gG  |
|   | <b>screw-type terminal top and bottom (load circuit)</b>  |
| Neutral conductor position                              | left  |
| Protection against direct contact                       | DGUV V3, VDE 0660-514, finger and back-of-hand proof  |
| Connection C1 Maximum number of conductors per terminal | 2 (conductors of same type and cross-section)   |
| Cross section solid                                     | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Connecting capacity flexible                            | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section stranded                                  | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section AWG, solid                                | 15 ... 1  |
| Cross section AWG, stranded                             | 15 ... 1  |
| Cross section AWG, flexible                             | 15 ... 1  |
| Cross section AWG, flexible with ferrule                | 15 ... 1  |
| Tightening torque                                       | 2.5 Nm ... 3 Nm   |
|   | <b>General data</b>   |
| Operating position                                      | optional  |
| max. Operating altitude above MSL                       | 2000 m  |
| Mechanical endurance                                    | min. 5000 cycles  |
| Electrical endurance                                    | min. 2000 cycles  |
| Storage temperature                                     | -35 °C ... 75 °C  |
| Ambient temperature                                     | -25 °C ... 40 °C  |
| Climate resistance                                      | according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH)                        |
| Shock resistance  | 20 g / 20 ms Duration   |
| Fatigue limit   | > 5 g (f ≤ 80 Hz, duration > 30 min.)   |
| Housing type  | distribution board housing  |
| Installation type                                       | Mounting rail (35 mm)   |
| Housing material  | thermoplastic   |
| Protection class  | IP20 (installed: IP40)  |
| sealable  | true  |

Subject to technical changes


| Technical Data                | DFS 4 080-4/0,03-AC Hz60 V120/208 |
|-------------------------------|-----------------------------------|
| Width                         | 72 mm                             |
| Height                        | 85 mm                             |
| Depth                         | 75 mm                             |
| Installation depth            | 69 mm                             |
| Module widths                 | 4                                 |
| Weight                        | 0.44 kg                           |
| Design requirements/Standards | VDE 0664-10, DIN EN 61008-1       |
| Degree of pollution           | 2                                 |

**Dimensions**



Dimensional drawing Group view

**Wiring example**

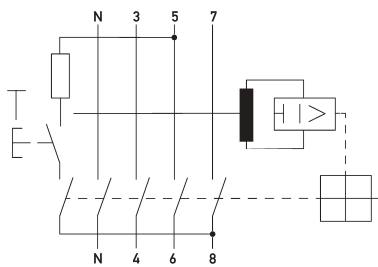

Wiring diagram