

## DATA SHEET

### LSPG

Article number 09500214



[Internetlink](#)

#### Function

Optional devices apply as accessories to the main product classes. The LSPG facilitates easy, user-friendly operation and configuration of the LSG lighting scene control devices. It provides separate keys for smoothly adjusting and switching the outputs, recalling the four lighting scenes and the central commands "on" and "off". A 15-wire cable with a D-sub plug and a length of up to 100 m establishes the connection to the LSG. The LSPG is therefore very versatile: it provides the option of stationary or mobile use in the distribution board or at the lectern of a lecture theatre.

#### Features

easy, user-friendly programming of LSG without connecting switches, handy, dirt-proof housing with protection class IP40, LSG connection cables with D-sub plugs, can be extended up to 100 m, supply voltage from LSG


#### Applications

On the one hand, the LSPG is an efficient commissioning tool for lighting scene devices LSG 1, LSG 2 and LSG 3, and on the other, it is excellently suited to use as a remote control for these LSG devices, i.e. for smooth adjustment and recalling lighting scenes.

#### Technical Data


Technical Data	LSPG
Series	LSPG
Specification keyboard	Membrane keyboard
max. Length connection cable	100 m
General data description	General data
Ambient temperature	-10 °C ... 45 °C
Housing type	closed
Housing material	Polycarbonate (PC)
Protection class	IP20
Width	64 mm
Height	100 mm
Depth	23.5 mm

Dimensions

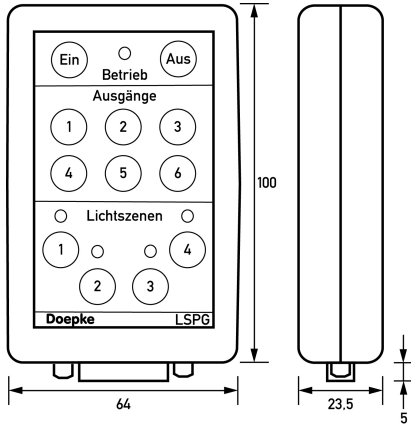

Dimensional drawing Group view

Wiring example

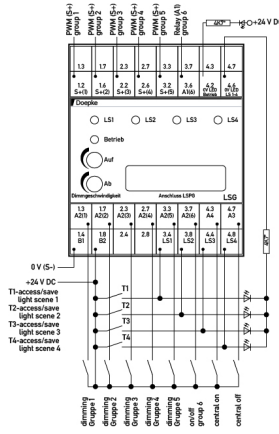

Wiring diagram