

symbolic image

**DATA SHEET**  
**residual current operated circuit-breakers with integral overcurrent protection**  
**FIC 06/0,03/3+N-B SK**  
**AC/DC sensitive type B, C characteristic**  
**Article number 09958121**



**Function**

RCCB/MCB combinations (RCBO) are residual current operated circuit-breakers with integral overcurrent protection for protecting systems in the event of a short-circuit and overload as per the requirements of VDE 0100 Part 430, and for protecting persons, farm animals and material items in the event of earth leakage currents as per VDE 0100 Part 410. Overload tripping occurs at currents in the overload range through a short-time delayed, heat-sensitive bimetal trip and at short-circuit currents through an electromagnetic instantaneous trip. FIB/FIC of this series have a rated switching capacity of 6 kA. They provide a labelling area in addition to the tripping indicator. Type B residual current circuit-breakers detect smooth DC residual currents and all other residual currents at frequencies up to 150,000 Hz. The operating voltage required for this is taken from the mains supply. Correct power supply is ensured when the voltage between the mains conductors is  $\geq 50$  V. Pulsating and AC residual currents are detected independent of the mains voltage. Residual current circuit-breakers with the tripping characteristic curve SK ensure residual current protection and a high system availability. They are characterised by a lower response sensitivity at higher frequencies. The characteristic curve SK is optimised for systems in which no fire protection is required. They detect residual currents with frequencies up to 150,000 Hz. RCBOs with tripping characteristic C are primarily suitable for power circuits with high switch-on or peak currents, as their short-circuit trip value is five to ten times the rated current. Devices in standard design are intended for monitoring circuits with a rated voltage of 230 V or 400 V and a rated frequency of 50 Hz.

**Features**

AC/DC sensitive for residual currents with frequencies of 0 Hz (smooth direct current) up to 150 kHz, mains-voltage-independent tripping when type A residual currents occur, compact design for all rated currents, switch position indicator, separate indication of tripping cause, strain-relief clamps with a wide terminal cross-section range on both connection sides, neutral conductor right, labelling area, high immunity against transient leakage and residual currents thanks to slow tripping response

**Mounting**

quick fastening to mounting rail, any installation position, supply preferably from above

**Applications**

commercial and industrial installations with TT, TN-S and TN-C-S systems, where power electronics equipment is used without galvanic isolation from the mains, e.g. frequency converters, switching power supplies, high-frequency converters, photovoltaic installations and UPS equipment with frequency converters without transformers, Type B+ and type B RCBOs with characteristic curve NK should be used where fire protection is legally required.

**Notes**

suitable for use in 50 Hz AC networks, RCBOs are also available for other frequencies upon request, not designed for use in direct current networks or on the output side of controlled electrical equipment such as frequency converters

**Accessories**

auxiliary switches DRCBO 4 Hi 1

**Technical Data**


Technical Data	FIC 06/0,03/3+N-B SK
Series	FIC
Number of poles	3+N
Residual current type	B
Tripping characteristic curve	SK
Rated current (AC)	6 A

Technical Data		FIC 06/0,03/3+N-B SK
Rated residual current $I_{\Delta n}$		0.03 A
Short-time delayed		true
Selective		false
min. Operating voltage range of test circuit		170 V
max. Operating voltage range of test circuit		250 V
Minimum rated operating voltage (Type A/AC operation)		0 V AC
Minimum rated operating voltage (Type B operation)		50 V AC
Non-trip time		10 ms
Tripping frequency		0 Hz ... 150 kHz
Maximum disconnection times		$1 \cdot I_{\Delta n}: \leq 300 \text{ ms}; 5 \cdot I_{\Delta n}: \leq 40 \text{ ms}$
Tripping characteristic		C
Supply side		up
Operating voltage (AC)		max. 440 V
Internal consumption		max. 2.2 W
		<b>load circuit</b>
Specification		load disconnect contact
Rated voltage (AC)		230 V, 400 V
Rated current (AC)		6 A
Rated short-circuit current		6 kA
Surge current strength		3 kA
max. Total rated switching capacity		6 kA
Rated insulation voltage		440 V
Rated impulse withstand voltage		4 kV
Rated frequency		50 Hz
Current heat loss per current path		1.2 W
Short-circuit backup-fuse SCPD		100 A
Back-up fuse type		gG
Overvoltage class		III
		<b>screw-type terminal top, bottom (load circuit)</b>
Neutral conductor position		right
Connection C1 Maximum number of conductors per terminal		2 (conductors of same type and cross-section)
Cross section solid		1-wire: 1 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Connecting capacity flexible		1-wire: 1 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Cross section stranded		1-wire: 1 mm <sup>2</sup> ... 25 mm <sup>2</sup> ; 2-wire: 1 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Tightening torque		2 Nm ... 2.4 Nm
		<b>General data</b>
Operating position		optional
Mechanical endurance		min. 5000 switching cycles
Electrical endurance		min. 2000 switching cycles
Ambient temperature		-25 °C ... 40 °C
Climate resistance		according to IEC 60068-2-30
Shock resistance		20 g / 20 ms Duration
Fatigue limit		> 5 g (f ≤ 80 Hz, duration > 30 min.)
Housing type		distribution board housing

Subject to technical changes


Technical Data		FIC o6/o,03/3+N-B SK
Installation type		Mounting rail (35 mm)
Housing material		thermoplastic
Protection class		IP20 (installed: IP40)
Width		106 mm
Height		91 mm
Depth		73.5 mm
Installation depth		67 mm
Module widths		6
Weight		0.605 kg
Design requirements/Standards	VDE o664-20, VDE o664-40, VDE o664-401, EN 61009-1, EN 62423, ÖVE/ÖNORM E 8601	
Power limitation category		3
Degree of pollution		2

Dimensions

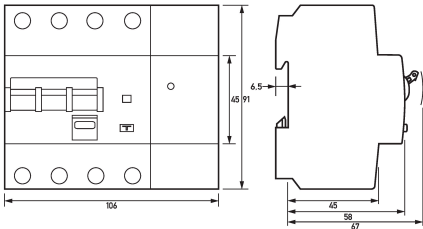

Dimensional drawing Group view

Wiring example



Wiring diagram