



## DATA SHEET

### residual current circuit-breaker

#### DFS 4 063-4/0,30-PV HD

AC/DC sensitive, fire protection according to VDE 0100-420, for PV installations, for harsh environments

Article number 09146804HD



#### Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. Devices in the DFS 4 series are compact four-pole residual current circuit-breakers for single-phase or three-phase networks. In the standard version, they only occupy four division units. The AC/DC-sensitive switches detect smooth DC residual currents and all other residual currents in accordance with DIN VDE 0664-400. Switches of the PV series have been specially developed for use in photovoltaic systems and offer the highest possible protection level for this purpose. With a PV-optimised short-time delay, the AC/DC sensitive residual current circuit breaker is resistant to surge currents. It thus offers higher system availability due to fewer false trippings. Devices in the standard design are intended for monitoring circuits with a rated voltage of 230 V, 400 V and a rated frequency of 50 Hz. With an airtight, encapsulated tripping mechanism from a special alloy and the stainless steel latch, residual current circuit-breakers in HD design are protected, in particular from corrosion, corrosive gases, moisture and extreme temperature fluctuations.

#### Features

AC/DC sensitive for residual currents with frequencies and mixed frequencies from 0 Hz to 20 kHz, fire protection according to VDE 0100-420, complete functionality with mains voltages from at least 50 V AC on any two active conductors, high short-circuit resistance, double-sided double-decker terminals for large conductor cross-section and busbar connection, switching position indicator, multifunction control toggle with three positions: "on", "off", "triggered", any neutral conductor position

#### Mounting

quick fastening to mounting rail, any installation position, supply preferably from above

#### Applications

RCCBs of the PV series are suitable for private, commercial and industrial installations with TN-S, TT and TN-C-S systems in which photovoltaic systems are installed.

#### Notes

suitable for use in 50 Hz AC networks, not intended for use on the output side of controlled electrical equipment such as frequency converters

#### Accessories

automatic reclosing devices DFA, terminal caps KA, information stickers HAS, auxiliary switches DHi, restart locks DFS WES, software DBS

#### Technical Data

Technical Data	DFS 4 063-4/0,30-PV HD
Series	DFS 4 PV HD
Number of poles	4
Residual current type	B+
Rated current (AC)	63 A
Rated residual current I $\Delta$ n	0.3 A
Short-time delayed	true
Selective	false
min. Operating voltage range of test circuit	200 V


Subject to technical changes

Technical Data	DFS 4 063-4/0,30-PV HD
max. Operating voltage range of test circuit	440 V
Minimum rated operating voltage (Type A/AC operation)	0 V AC
Minimum rated operating voltage (Type B operation)	50 V AC
Non-trip time	13 ms
Tripping frequency	0 Hz ... 20 kHz
Maximum disconnection times	$1 \cdot I\Delta n: \leq 300 \text{ ms}; 5 \cdot I\Delta n: \leq 40 \text{ ms}$
Internal consumption	max. 1.3 W
	<b>load circuit</b>
Specification	load disconnect contact
min. Contact opening	4 mm
Rated voltage (AC)	230 V, 400 V
Rated current (AC)	63 A
Rated short-circuit current	6 kA
Surge current strength	3 kA
max. Total rated switching capacity	630 A
Rated insulation voltage	400 V
Rated impulse withstand voltage	4 kV
Rated frequency	50 Hz
Current heat loss per current path	3.1 W
Thermal Backup-fuse OCPD	63 A
Short-circuit backup-fuse SCPD	100 A
Back-up fuse type	gG
	<b>screw-type terminal top and bottom (load circuit)</b>
Neutral conductor position	left
Protection against direct contact	DGUV V3, VDE 0660-514, finger and back-of-hand proof
Connection C1 Maximum number of conductors per terminal	2 (conductors of same type and cross-section)
Cross section solid	1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Connecting capacity flexible	1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Cross section stranded	1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Cross section AWG, solid	15 ... 1
Cross section AWG, stranded	15 ... 1
Cross section AWG, flexible	15 ... 1
Cross section AWG, flexible with ferrule	15 ... 1
Tightening torque	2.5 Nm ... 3 Nm
	<b>General data</b>
Operating position	optional
max. Operating altitude above MSL	2000 m
Mechanical endurance	min. 4000 cycles
Electrical endurance	min. 2000 cycles
Surrounding atmosphere	harsh environmental conditions
Storage temperature	-35 °C ... 75 °C
Ambient temperature	-25 °C ... 60 °C
Climate resistance	according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH)

Subject to technical changes


Technical Data	DFS 4 063-4/0,30-PV HD
Housing type	distribution board housing
Installation type	Mounting rail (35 mm)
Housing material	thermoplastic
Protection class	IP20 (installed: IP40)
sealable	true
Width	72 mm
Height	85 mm
Depth	75 mm
Installation depth	69 mm
Module widths	4
Weight	0.48 kg
Design requirements/Standards	VDE 0664-10, VDE 0664-400, ÖVE/ÖNORM E 8601
Degree of pollution	2
Certifications	VDE

**Dimensions**

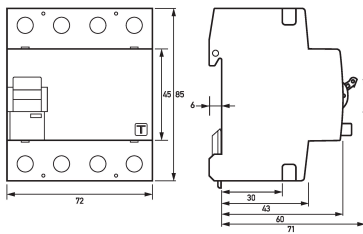

Dimensional drawing Group view

**Wiring example**



Wiring diagram